


SERVICE SOLUTIONS // HOW TO

EVERY SECOND WEEK REFILL FOOD GRADE GREASE ON THE APS7

1. Dismount the closing plugs - position A-B
2. Fix a high pressure grease nipple to position A
3. Press grease into the nipple using a grease gun
4. Fill with grease, till you see that clear clean grease is coming out of the bottom holes - position B and C
5. Re-mount the closing plugs
6. Run the transmission for minimum 45 minutes and then it is ready for use

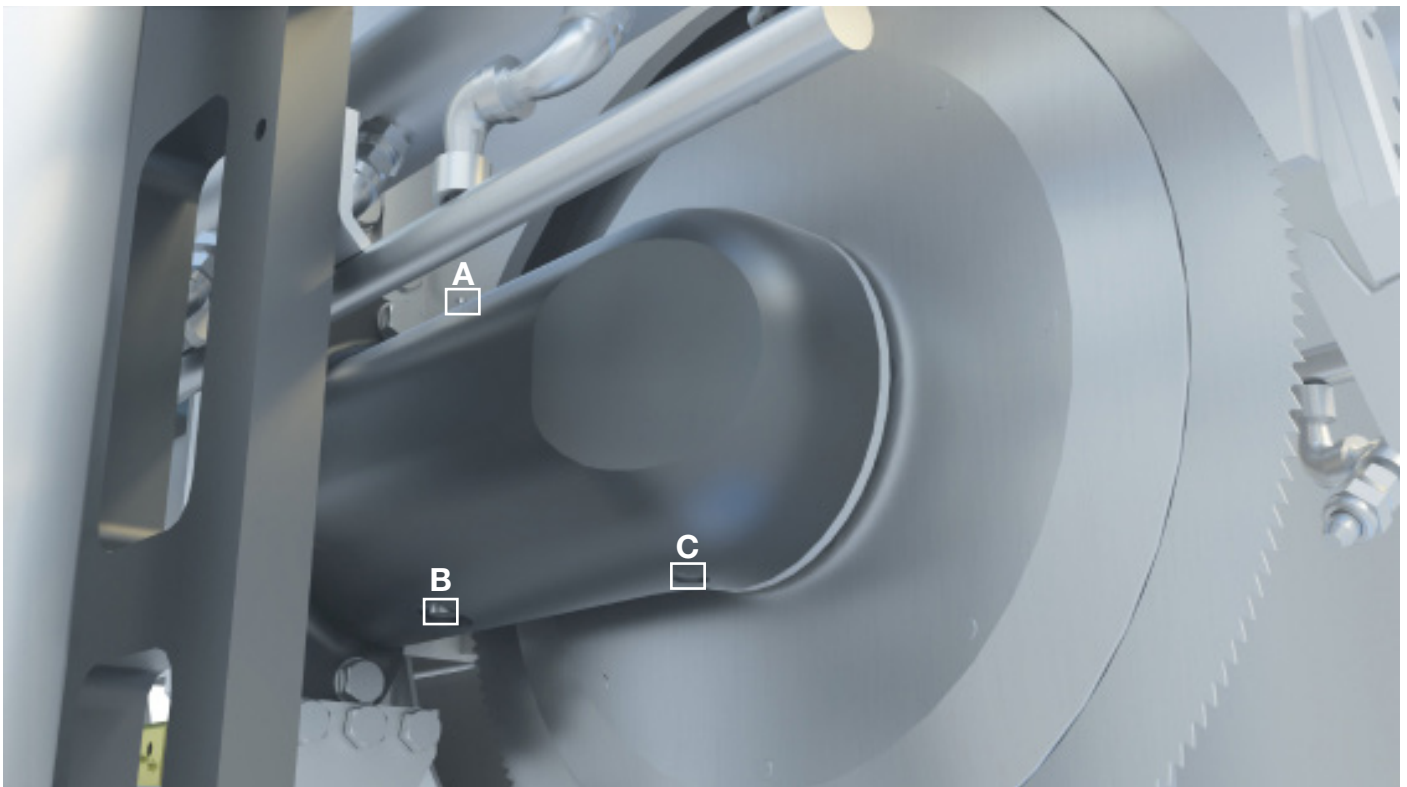

Food grade grease	Plugs	Nipple
SLBG-F Grease for transmission box 290 g	VSTI-R1/8ED	H1 M6 High pressure, straight for grease lubrication

CONTACT

Central/Eastern Europe
+49 252 185 070
service.de@frontmatec.com

Northern Europe, Kolding
+45 36 999 099
service.kol.dk@frontmatec.com

Northern Europe, Tandslet
+45 74 407 644
service.tan.dk@frontmatec.com

Southern Europe
+34 932 643 800
service.es@frontmatec.com

Western Europe
+31 886 294 000
service.nl@frontmatec.com